FREE-BODY DIAGRAMS, EQUATIONS OF EQUILIBRIUM & CONSTRAINTS FOR A RIGID BODY

Today's Objective:

Students will be able to:


- a) Identify support reactions in 3-D and draw a free body diagram, and,
- b) apply the equations of equilibrium.





APPLICATIONS




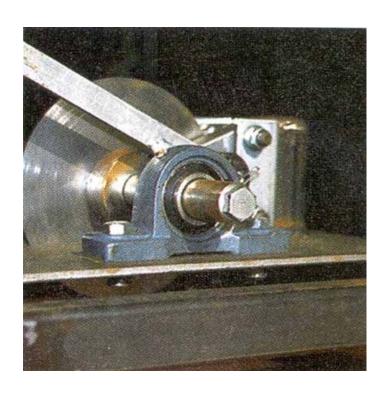


Ball-and-socket joints and journal bearings are often used in mechanical systems.

How can we determine the support reactions at these joints for a given loading?

APPLICATIONS (continued)

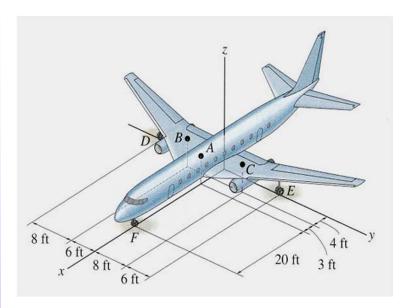


The weights of the fuselage and fuel act through A, B, and C. How will we determine the reactions at the wheels D, E and F?

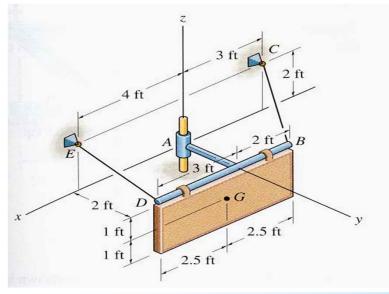

A 50 lb sign is kept in equilibrium using two cables and a smooth collar. How can we determine the reactions at these supports?



SUPPORT REACTIONS IN 3-D (Table 5-2)

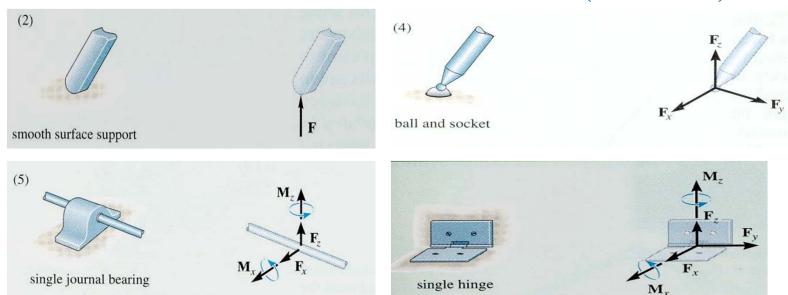

A few examples are shown above. Other support reactions are given in your text book (<u>Table 5-2</u>).

- If a support prevents translation of a body in a direction b, then a force F_b is developed on the body in the opposite direction.
- If rotation is prevented in direction b, a couple moment M_b is exerted on the body. (Review 5-1)



EQUATIONS OF EQUILIBRIUM

(Section 5.6)

As stated earlier, when a body is in equilibrium, the net force and the net moment equal zero, i.e., $\sum \mathbf{F} = 0$ and $\sum \mathbf{M_0} = 0$.


These two vector equations can be written as <u>six scalar</u> equations of equilibrium (EofE). These are

$$\sum \mathbf{F}_{\mathbf{X}} = \sum \mathbf{F}_{\mathbf{Y}} = \sum \mathbf{F}_{\mathbf{Z}} = 0$$

$$\sum \mathbf{M}_{\mathbf{X}} = \sum \mathbf{M}_{\mathbf{Y}} = \sum \mathbf{M}_{\mathbf{Z}} = 0$$

The moment equations can be determined about any point. Usually, choosing the point where the maximum number of unknown forces are present simplifies the solution. Those forces do not appear in the moment equation since they pass through the point. Thus, they do not appear in the equation.

CONSTRAINTS FOR A RIGID BODY

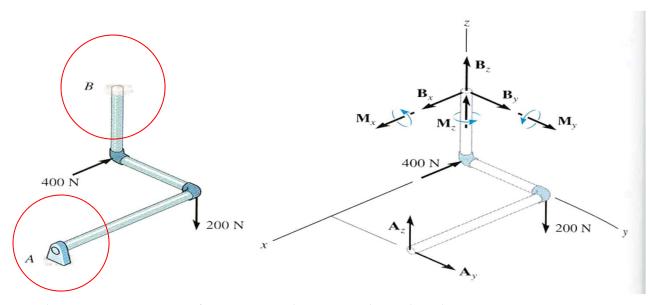



Redundant Constraints: When a body has more supports than necessary to hold it in equilibrium, it becomes statically indeterminate.

A problem that is *statically indeterminate* has more unknowns than equations of equilibrium.

Are statically indeterminate structures used in practice? Why or why not?

IMPROPER CONSTRAINTS

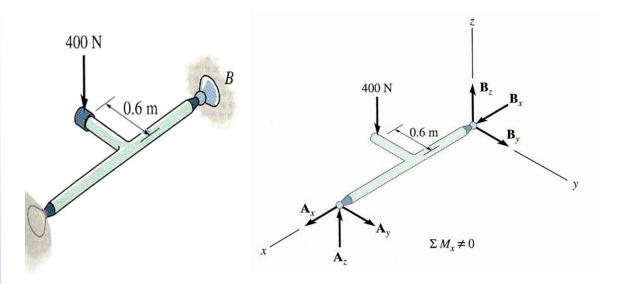



Here, we have 6 unknowns but there is nothing restricting rotation about the x axis.


In some cases, there may be as many unknown reactions as there are equations of equilibrium. However, if the supports are not properly constrained, the body may become unstable for some loading cases.

Given: The cable of the tower crane is subjected to a 840 N force. A fixed base at A supports the crane.


Find: Reactions at the fixed base A.

Plan:

- a) Establish the x, y and z axes.
- b) Draw a FBD of the crane.
- c) Write the forces using Cartesian vector notation.
- d) Apply the equations of equilibrium (vector version) to solve for the unknown forces.

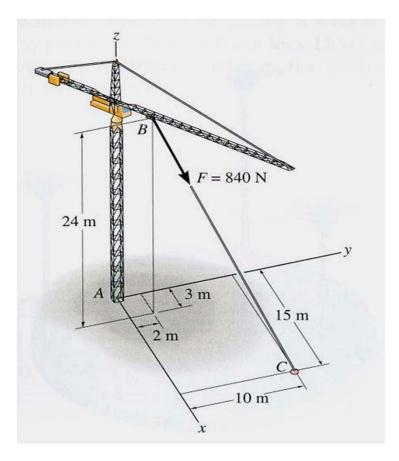

(continued)



$$r_{BC} = \{12 \ i + 8j - 24k\} \text{ m}$$

$$F = F[u_{BC}] N$$

$$= 840 \left[12 \, \boldsymbol{i} + 8 \, \boldsymbol{j} - 24 \, \boldsymbol{k} \right] / \left(12^2 + 8^2 + (-24^2) \right)^{1/2}$$

$$= \{360 \, \boldsymbol{i} + 240 \, \boldsymbol{j} - 720 \, \boldsymbol{k}\} \, \mathrm{N}$$


$$F_A = \{A_X i + A_Y j + A_Z k\} N$$




F=840N

(MA)X

(continued)

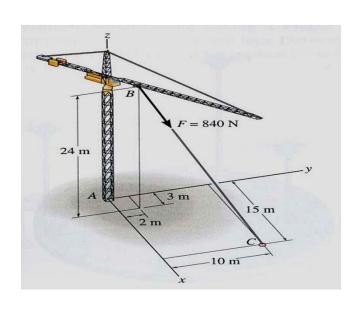

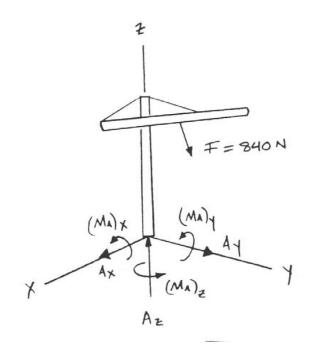


From E-of-E we get,
$$\mathbf{F} + \mathbf{F}_A = 0$$


$$\{(360 + A_X)i + (240 + A_Y)j + (-720 + A_Z)k\} = 0$$

Solving each component equation yields $\underline{A_{\underline{X}}=-360~N}$, $\underline{A_{\underline{Y}}=-240~N}$, and $\underline{A_{\underline{Z}}=720~N}$.



(continued)





Sum the moments acting at point A.

$$\sum M = M_{A} + r_{AC} \times F = 0$$

$$= M_{AX} i + M_{AY} j + M_{AZ} k + \begin{bmatrix} i & j & k \\ 15 & 10 & 0 \\ 360 & 240 - 720 \end{bmatrix} = 0$$

$$= M_{AX} i + M_{AY} j + M_{AZ} k - 7200 i + 10800 j = 0$$


$$\underline{M_{AX}} = 7200 \text{ N} \cdot \text{m}$$
, $\underline{M_{AY}} = -10800 \text{ N} \cdot \text{m}$, and $\underline{M_{AZ}} = 0$

Note: For simpler problems, one can directly use three scalar moment equations, $\sum M_X = \sum M_Y = \sum M_Z = 0$



CONCEPT QUIZ


- 1. The rod AB is supported using two cables at B and a ball-and-socket joint at A. How many unknown support reactions exist in this problem?
 - 1) 5 force and 1 moment reaction
 - 2) 5 force reactions
 - 3) 3 force and 3 moment reactions
 - 4) 4 force and 2 moment reactions

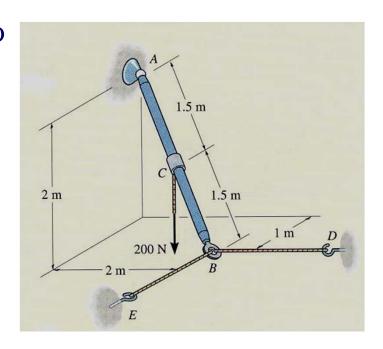




CONCEPT QUIZ (continued)

- 2. If an additional couple moment in the vertical direction is applied to rod AB at point C, then what will happen to the rod?
 - A) The rod remains in equilibrium as the cables provide the necessary support reactions.
 - B) The rod remains in equilibrium as the ball-and-socket joint will provide the necessary resistive reactions.
 - C) The rod becomes unstable as the cables cannot support compressive forces.
 - D) The rod becomes unstable since a moment about AB cannot be restricted.





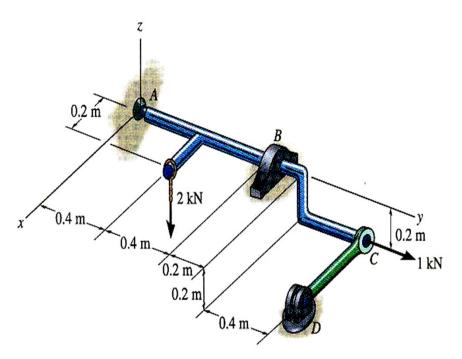

Given: A rod is supported by a ball-and-socket joint at A, a journal bearing at B and a short link at C

Find: The reactions at all the supports for the loading shown.


Plan:

- a) Draw a FBD of the rod.
- b) Are the supports properly aligned?
- b) Apply scalar equations of equilibrium to solve for the unknowns.



(continued)

A FBD of the rod:

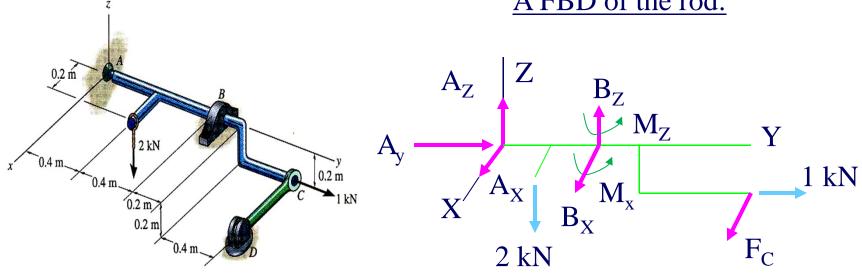


We have more unknowns, 8, than possible equations, 6. Looks like A assists B so probably properly aligned. Assume $M_z = M_x = 0$.



(continued)

A FBD of the rod:

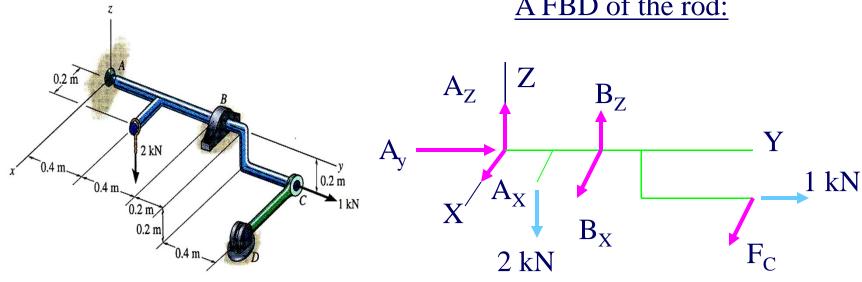

Applying scalar equations of equilibrium in appropriate order, we get

$$\sum M_Y = 2 (0.2) - F_C (0.2) = 0;$$
 $F_C = 2 k N$


$$\sum_{Y} F_{Y} = A_{Y} + 1 = 0$$
; $A_{Y} = -1 k N$


$$\sum M_Z = -2 (1.4) B_X (0.8) = 0; B_X = -3.5 kN$$



(continued)

A FBD of the rod:

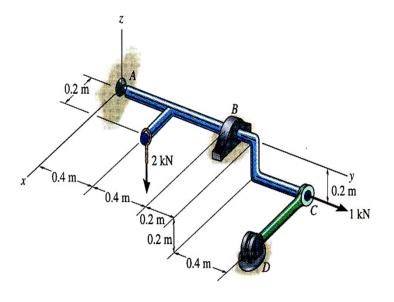

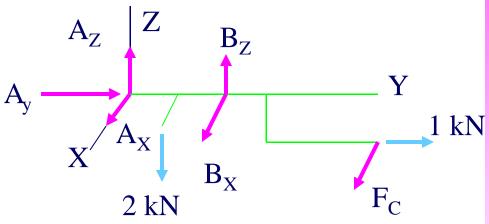

$$\sum F_X = A_X - 3.5 + 2 = 0$$
;

$$A_{\rm X} = 1.5 \, \rm kN$$

$$\sum M_X = -2 (0.4) + B_Z (0.8) + 1 (0.2) = 0;$$
 $B_Z = 0.75 \text{ kN}$

$$B_Z = 0.75 \text{ kN}$$


$$\sum F_Z = A_Z + 0.75 - 2 = 0$$
;

$$A_{\rm Z} = 1.25 \, \rm kN$$



ATTENTION QUIZ

- 1. A plate is supported by a ball-and-socket joint at A, a roller joint at B, and a cable at C. How many unknown support reactions are there in this problem?
 - A) 4 forces and 2 moments
 - B) 6 forces
 - C) 5 forces
 - D) 4 forces and 1 moment





ATTENTION QUIZ

- 2. What will be the easiest way to determine the force reaction B_Z ?
 - A) Scalar equation $\sum F_Z = 0$
 - B) Vector equation $\sum M_A = 0$
 - C) Scalar equation $\sum M_Z = 0$
 - D) Scalar equation $\sum M_Y = 0$

